

DOCKET FILE COPY ORIGINAL

K R A S K I N, L E S S E & C O S S O N, L L P
ATTORNEYS AT LAW
TELECOMMUNICATIONS MANAGEMENT CONSULTANTS

2120 I. Street, N.W., Suite 520
Washington, D.C. 20037

Telephone (202) 296-8890
Telecopier (202) 296-8893

January 11, 2001

RECEIVED

JAN 11 2001

**FEDERAL COMMUNICATIONS COMMISSION
OFFICE OF THE SECRETARY**

Magalie Roman Salas, Secretary
Federal Communications Commission
445 Twelfth Street, S.W.
Washington, D.C. 20554

Attn: Wendy Austrie, Policy Division, Wireless Telecommunications Bureau

Re: Mid-Maine Wireless
Carrier Reports on Implementation of Wireless E911 Phase II
Automatic Location Identification - CC Docket No. 94-102

Dear Ms. Salas:

Pursuant to Section 20.18(i) of the Commission's Rules and in response to the Federal Communications Commission's letter dated December 27, 2000, Mid-Maine Wireless ("Mid-Maine") hereby submits its carrier report on implementation of Wireless E911 Phase II Automatic Location Identification ("ALI") (CC Docket No. 94-102)¹

Mid-Maine has not begun offering wireless service. To date, Mid-Maine has not received a Phase II request from a PSAP that is capable of receiving and utilizing the data elements and has a mechanism in place for recovering the PSAP's costs. Accordingly, this report does not reference any schedules for installation of the hardware and/or software needed to implement E911 Phase II ALI and does not contain a TRS number.

At this time, Mid-Maine plans to utilize a handset-based technology but has not determined which particular vendor to use. As it investigates and negotiates with various vendors, including Tendler Cellular and SnapTrack (see attached), it will consider whether the products offered are compatible with the proposed facilities and whether they are available with the features required by

¹A facsimile copy of the Declaration by an authorized company representative attesting to the accuracy of this report is attached. A supplemental filing will be made after the original has been received. This report is submitted with the caveat that these plans do not constitute a final or irrevocable commitment to the ALI technology the company will employ. Updates will be provided as appropriate. See *In the Matter of Revision of the Commission's Rules to Ensure Compatibility with Enhanced 911 Emergency Calling Systems: Third Report and Order*, 14 FCC Rcd 17388, 17428 (1999).

No. of Copies rec'd 074
List A B C D E

Magalie Roman Salas

January 11, 2001

Page 2

the target subscriber base.

The contact person for Mid-Maine is

Gary Sugarman, President
44 Broadway
Bangor, Maine 04401
Phone 207-884-9911
Fax 207-884-9991
E-mail gary@midmaine.com

Please let me know if you have any questions regarding this report.

By: 

Sylvia Lesse
John Kuykendall
Its Attorneys


Kraskin, Lesse & Cosson, LLP
2120 L Street, N.W.
Suite 520
Washington, D.C. 20037
(202) 296-8890

Attachment

DECLARATION

I, Gary Sugarman, President of Mid-Maine Wireless ("Mid-Maine"), do hereby declare under penalties of perjury that I have read the foregoing "Carrier Reports on Implementation of Wireless E911 Phase II Automatic Location Identification" and the information contained therein that pertains to Mid-Maine is true and accurate to the best of my knowledge, information and belief.

Date:

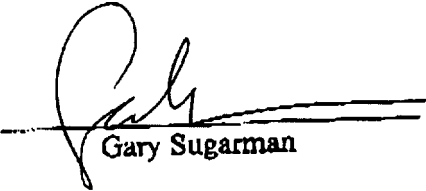1/09/01

Gary Sugarman

ATTACHMENT 1



C E L L U L A R

Robert K. Tendler, *Chairman*

E-911 COMPLIANCE

As the deadline for responding to the E-911 deadline approaches, and as the Chairman of Tendler Cellular, we would like to inform your company about the availability of FoneFinder[®], the first autonomous GPS handset approach to location. FoneFinder-equipped phones are the complete answer for both Phase I and Phase II of the E-911 Report and Order (see www.fonefinder.com) and do so without any additional infrastructure.

Tendler Cellular has developed the first GPS in a handset, with the Audiovox CDM-9000 FoneFinder phones meeting the E-911 mandate with incredible 3-meter accuracy.

The key to FoneFinder is that it transmits GPS location via synthesized voice and DTMF tones over the voice channel direct to a PSAP or dispatch office using your existing network. This also means that with the provision of a FoneFinder handset the system is instantly deployable.

In terms of the rural carriers and compliance with the E-911 Report and Order, no longer does the rural carrier have to depend on triangulation systems where there may not be appropriate towers to get a triangulation fix. Nor do towers have to be retrofitted with anything. Nor does the carrier have to provide a back haul to the PSAP.

With FoneFinder-equipped phones the existing infrastructure is used, and for automatic location, terminals at the PSAP need only be provided with a Delorme map, a DTMF decoder and a \$30 Tendler Cellular software interface (eg. \$230/terminal).

What this does is give your EMTs, Police and Firemen almost free location. Better yet, it is available now.

Additionally, FoneFinder-equipped phones offer complete telematics in a handset, and have been likened to Cadillac OnStar without having to buy the car. This is because all FoneFinder phones come equipped with a protected 911 button and a roadside assistance concierge button. The 911 calls go direct to the PSAP, with the roadside

assistance concierge calls going to a third party dispatch operation such as the Cross Country Group, AAA, ATX, 1800TOWTRUCK and others.

It is a feature of the FoneFinder phones that location-based services such as roadside assistance and concierge services provide revenue streams which more than offset the cost of the FoneFinder phones. Also, because of the unique capabilities of FoneFinder, carriers can expect more activations and airtime.

It should be noted that while FoneFinder is available in CDMA/analog phones, TDMA/analog phones are in design.

As the carriers undoubtedly know, the rural carrier can meet the FCC mandate by declaring the intention to go with the handset approach and by providing 50% of new phones with GPS location technology. For rural carriers this is not a lot of phones.

We believe that FoneFinder offers the simplest and most cost effective way of meeting the mandate and does so with fully integrated GPS phones available now.

Robert K. Tendler,
Chairman
Tendler Cellular, Inc.

65 Atlantic Avenue, Boston, MA 02110
Telephone 617-720-1339 • Fax 617-723-7186

ATTACHMENT 2

An Introduction to SnapTrack™

Server-Aided GPS Technology

BIOGRAPHY

Mark Moeglein received his B.S. in Engineering in 1987 from Harvey Mudd College. He has been developing GPS-related systems since 1989, and has been a primary developer of the SnapTrack™ LocationServer technology since joining the company in 1996.

Norman Krasner received his B.S. in Electrical Engineering from M.I.T. in 1968 and M.S. and PhD from Stanford University in 1970 and 1974. He has worked in the fields of signal processing and communication systems design for over 30 years, including design of many spread spectrum communication systems. He was a co-founder of SnapTrack™ in 1995 and is currently V.P. of Technology.

ABSTRACT

The distributed SnapTrack™ server-aided GPS system architecture and DSP software-based receiver solution draw from the best of GPS and wireless communications technology. The DSP-based receiver is superior to conventional correlator-based approaches in terms of cost, sensitivity, time-to-first-fix and power consumption. A smart server provides key aiding information and performs navigation solutions, minimizing incremental handset costs and providing for improved acquisition times, sensitivity, and accuracy. This paper will describe the advantages of these innovations and demonstrate the technology with a presentation of field test results.

INTRODUCTION

SnapTrack™ has developed a distributed server-aided DSP-based processing approach to the problem of locating wireless communication devices. The key advantages to this approach, when compared to conventional GPS, are:

1. *High sensitivity.* The SnapTrack™ system can acquire and provide fixes in conditions with as much as 25dB (a factor of 300) signal attenuation or blockage. Traditional GPS technology can have difficulty acquiring signals when the attenuation exceeds 5-10 dB. This signal sensitivity improvement allows SnapTrack™-enhanced GPS to operate in difficult environments, such as most buildings, inside automobiles, under dense foliage, and in urban canyons, where traditional GPS is unreliable or unusable.

2. *Low Time-To-First-Fix.* Traditional GPS receivers require from 30 seconds to several minutes to acquire and track satellites, depending upon how much information they have previously gathered. In worst case environments, the SnapTrack™ system provides a first fix in just a few seconds. In open-sky situations, the first fix can be performed in less than a second.

3. *Low power dissipation.* SnapTrack™ technology performs *Location On Demand*, using a snapshot of data (typically 0.1 to 1 second, depending on sensitivity required), and then turns off. The entire location operation

takes only a few seconds for a "cold start" in a heavily blocked signal environment, and is significantly faster if prior information (such as local oscillator offset) is known or signal strength is high ($> -135\text{dBm}$). Thus, in those applications which do not require continuous high-rate positioning, the low duty cycle SnapTrack™-enhanced GPS receiver dissipates a small fraction of the power of the communication device (e.g., a portable handset) with which it is mated.

CONVENTIONAL GPS

A GPS user positioning system can be broken into four primary functions:

- (1) determining the code phases (pseudoranges) to the various GPS satellites,
- (2) determining the time-of-applicability for the pseudoranges,
- (3) demodulating the satellite navigation message, and
- (4) computing the position of the receiving antenna using these pseudoranges, timing, and navigation message data.

Most commercial GPS receivers perform all of these operations without any external assistance. In these conventional receivers, the satellite navigation message, and its inherent synchronization bits, are extracted from the GPS signal after it has been acquired and tracked. But collecting this information normally takes thirty seconds to several minutes. Also, a high received signal level (approximately -135dBm or greater) is required from all satellites to be used in the navigation solution for the 18 second duration of subframes 1-3.

DISTRIBUTED SYSTEM CONCEPT

The SnapTrack™ server-aided system architecture distributes the four primary functions described above between a GPS reference receiver, a location server, and a wireless GPS-enabled device (later referred to as a handset.) The basic system model is described in Figure 1.

A GPS reference receiver gathers navigation message and differential correction data for all satellites in view. In

another system configuration, the GPS reference receiver may be replaced by a network of reference receivers to provide coverage for a wide area, such as the continental U.S.

The location server receives and stores data from the GPS reference receiver (or network), provides aiding data to mobile units, and performs navigation solutions upon receipt of pseudorange measurements from the handset.

The aiding data, sent to each handset on-demand, is generally a list of satellites in view from the handset and their relative Doppler offsets. (Estimated Doppler can be improved by using the location of the base station communicating with the hand-held device as an approximate handset location.) This small message (approximately 50 bytes) is all the handset needs to know from the location server to extract pseudorange information from its short snapshot of GPS data.

The server also has access to a terrain elevation database. This allows it to perform accurate altitude aiding for ground-based applications, a capability that is impractical if the navigation solution is performed at the mobile. The terrain elevation provides essentially an extra range measurement, improving reliability and accuracy.

The server is able to mitigate multipath and reflected signal effects using a sequential measurement optimization (SMO) technique. The server also handles cross-correlations from strong signals onto the PRN codes of weaker satellites, as well as correcting for atmospheric delays.

In general, the location server is remote from the final application, such as service centers providing display and operator services.

The wireless GPS-enabled device can track far weaker GPS signals than a conventional GPS receiver, because it does not need to decode the navigation message. But

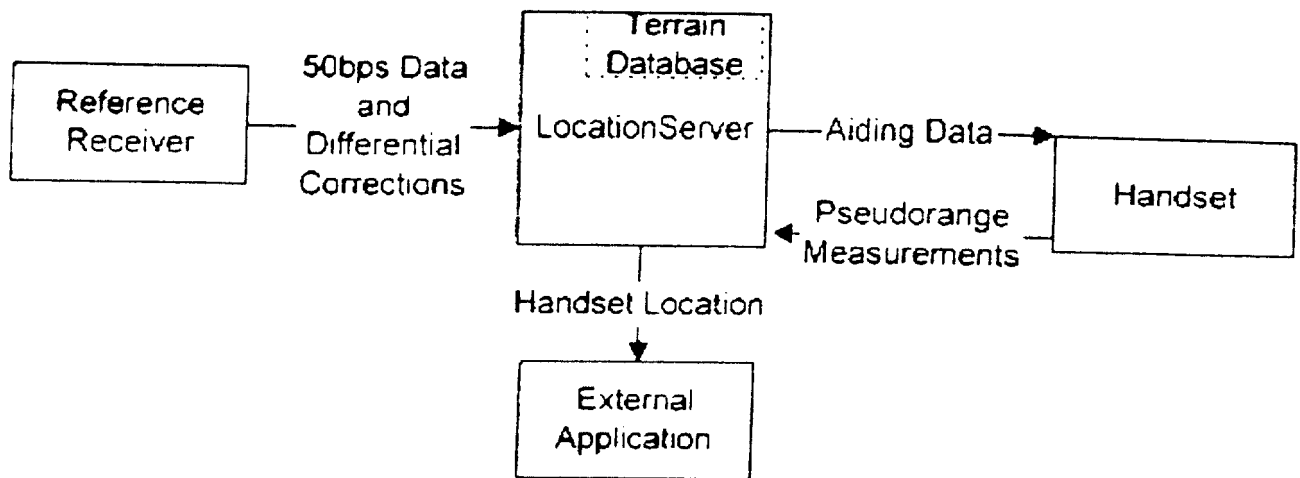


Figure 1 Basic system model

rapidly and accurately finding these weaker signals requires a powerful signal processing element to search over the large number of PRN codes, times-of-arrival, and offset frequencies (due to Doppler errors and local oscillator frequency errors). The DSP-based process for determining pseudoranges is described later in this paper.

CONVENTIONAL GPS CORRELATION TECHNIQUES

Conventional GPS receivers use correlation methods to compute pseudorange. A classic hardware correlator-based receiver multiplies the received signal by a stored (or generated) replica of the appropriate PRN code and then integrates, or lowpass filters, the product to obtain a peak correlation signal. The initial determination of the presence of a correlation peak is termed "acquisition."

Once a signal is acquired, the process enters the tracking mode in which the PRN code is removed, or "despread." This signal has a narrow bandwidth, commensurate with the 50 bit per second navigation message modulated onto the GPS waveform. At this point, the navigation message may be reliably demodulated if received signal strength is above approximately -135dBm for the duration of the message being received.

The conventional acquisition process is very time consuming, especially if received signals are weak. To improve acquisition time, most GPS receivers utilize a multiplicity of correlators (nominally ~36 for a 12-channel receiver), which allows a parallel search for correlation peaks as a function of time-of-arrival, PN code, and frequency offset. Recently, massively parallel correlators (on the order of 240) have been used to improve acquisition speed and sensitivity. In excess of

8000 correlators would be required to match the speed and sensitivity of the SnapTrack™ server-aided GPS fast convolution processing technique. And the processing speed of this technique will improve as DSP technology advances.

HANDSET ARCHITECTURE

Figure 2 is a "handset view" of the SnapTrack™ server-aided GPS system. Note that the conventional tracking loops are replaced by snapshot memory and fast convolution processing.

At the request of either an external application, or the handset user, the server sends information on satellites in view at the handset's approximate location, including Doppler predictions. After a snapshot of GPS satellite RF data has been stored in the handset memory, the DSP processes the data and returns pseudorange measurements to the server, along with other statistical information. This snapshot approach allows the handset to gather GPS data when it is not transmitting, thus eliminating potential self-interference.

Each of the messages between the handset and the location server is small (50-100 bytes). This represents a significant reduction in required communications bandwidth when compared to delivering differential corrections, almanac, ephemeris and/or satellite trajectory data to the handset.

to a period of 20 msec. That is, at most 20 one-millisecond-long epochs may be coherently added before data sign inversions prevent further coherent summation (unless this data is provided by the server). Additional processing gain may be achieved through summation of the magnitudes (or squares of magnitudes) of the coherently summed intervals, providing the sensitivity and accuracy shown in the curves of Figures 4 and 5.

A calibrated single-satellite GPS simulator and a demonstration system designed by SnapTrack™ were used to experimentally verify the performance predicted in Figure 4. The 20-meter accuracy predicted by Figure 5 with a 1-second snapshot and -150dBm signal strength was also demonstrated in later field testing.

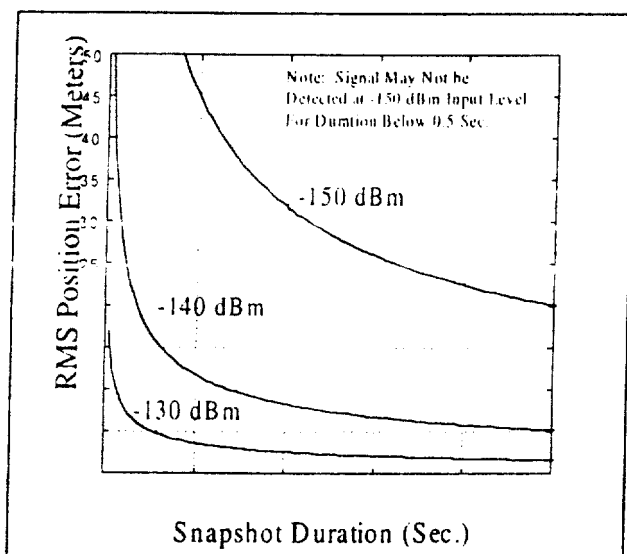


Figure 5 Predicted accuracy in thermal noise, HDOP=1.5

FIELD TEST RESULTS

The SnapTrack™ demonstration system was used extensively for field tests designed and audited by independent wireless carriers. Environments ranging from open sky to in-vehicle, indoor and urban canyon were investigated.

Table 1 summarizes test results from seven test locations visited over the past year. These selected results are representative of a much broader range of tests.

The test setup consisted of a 12-channel reference receiver transmitting reference data to a PC-based location server, which communicated with a SnapTrack™ sensor via modem over an analog cellular phone connection. The SnapTrack™ sensor used an off-the-shelf active patch antenna, and a long cable, which allowed testers to place the antenna in hard-to-reach places. Preliminary results indicate similar performance with a "micro-helix" passive antenna, which is more suitable for handset integration[2].

Environment	Conditions	Yield	68.3% Horizontal Error
Outdoors	Open site	100%	4 meters
Urban Street, Shinbashi, Tokyo	2-10 story buildings, narrow streets and alleys	100%	15 meters
Inside Sport Utility Vehicle	Parking lot surrounded by red wood trees and two-story buildings. Antenna placed on inside shoulder	100%	17 meters
Two Story House	Center of basement	100%	20 meters
Two-Story Office Building	1 st floor, interior room	94%	22 meters
Urban Canyon, Denver, CO	20-30 story buildings, wide streets, altitude aided	98%	29 meters
50-Story Building	Glass/Steel building, 21 st floor, 14 ft from outside wall	89%	84 meters

Table 1 Field test results summary

The system was operated such that no information was carried over for each successive sample. Thus, each

successive snapshot can be considered an independent "first fix." A more detailed description of each location

(with the exception of the outdoor, open sky environment) follows, with plots of the horizontal "shot pattern" from

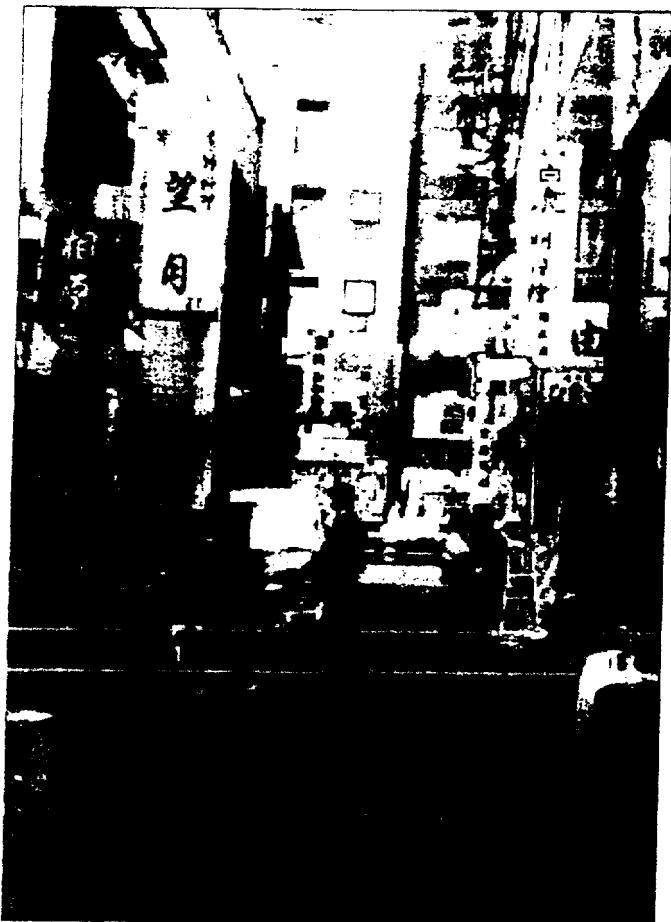


Figure 6a One-lane urban road

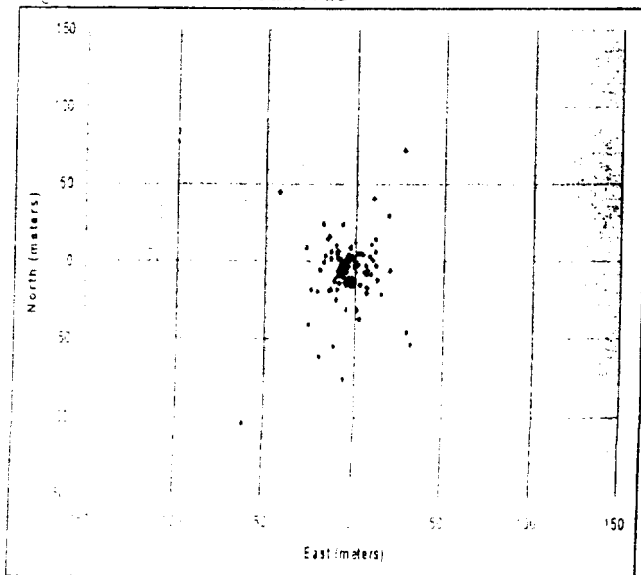


Figure 6b Shot pattern, one-lane urban road

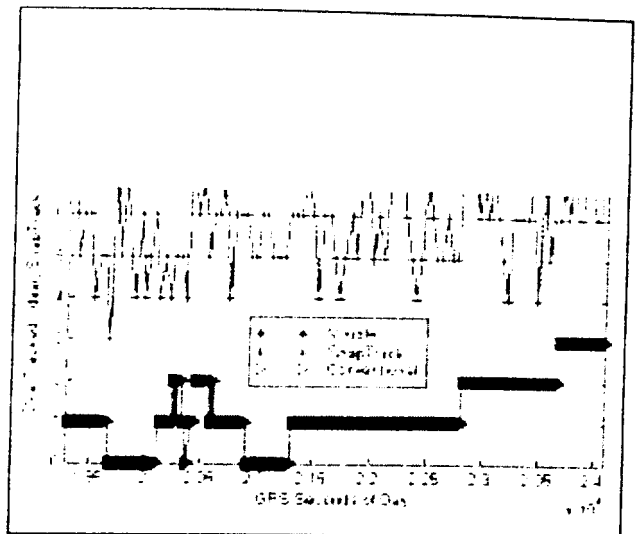


Figure 6c Satellites tracked by SnapTrack sensor and conventional hand-held

Test location: one-lane urban road

A Japanese wireless carrier selected the site depicted in Figure 6a to represent a fairly typical Tokyo environment. The antenna was placed approximately 3 feet above the ground on the side of a one-lane road, surrounded by 2-10 story buildings.

A conventional handheld GPS receiver was used for comparison purposes. This receiver was allowed to operate continuously throughout the data collection, resting horizontally (antenna facing the sky) near the antenna used for the SnapTrack handset.

Results in Figure 6c show the conventional receiver tracking 14.3% of the satellites in view over the data collection period, while the SnapTrack handset was able to acquire 65.3% of satellites on "cold starts" throughout the data collection interval.

Test location: sport utility vehicle

Figure 7a shows one of several test vehicles used in SnapTrack™ parking lot in-vehicle testing. This lot has moderate blockage from a two-story building, as well as several redwood trees overhead. Resultant accuracy is similar to that observed in most indoor tests.



Figure 7a Sport utility vehicle

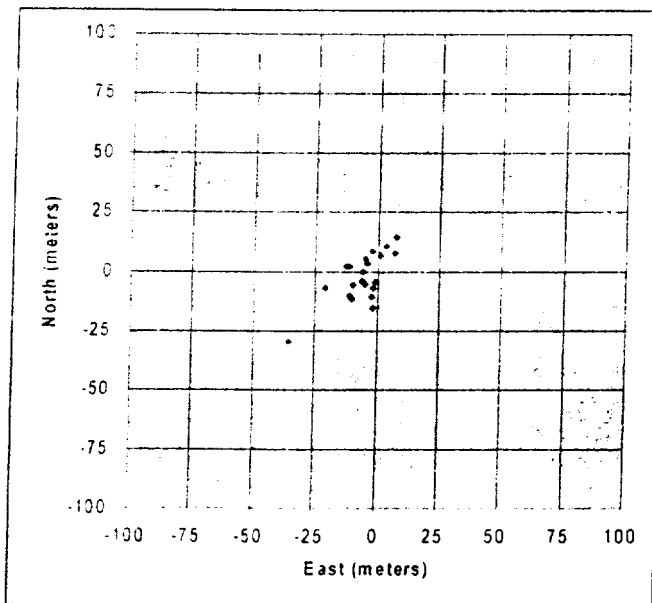


Figure 7b Shot pattern, sport utility vehicle



Figure 8a Westminster (Denver), Colorado house



Figure 8b GPS Antenna at center of basement

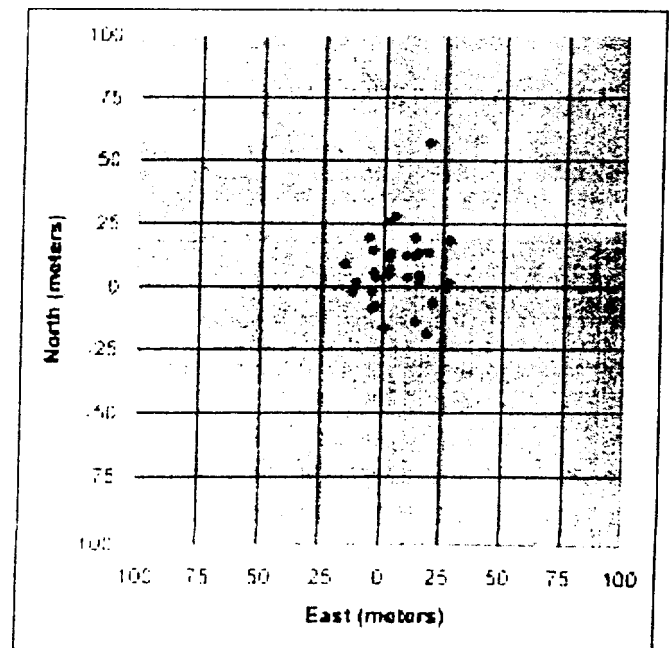


Figure 8c Shot pattern, basement of two-story house

Test location: basement of two-story residence

U.S. West selected the house in Figure 8a as a sample residence in the Denver area. As shown in Figure 8b, the antenna was placed in the center of the basement. (The 5-watt analog phone had to be placed outside to maintain enough signal strength for data connectivity.) Figure 8c shows system performance in this location.

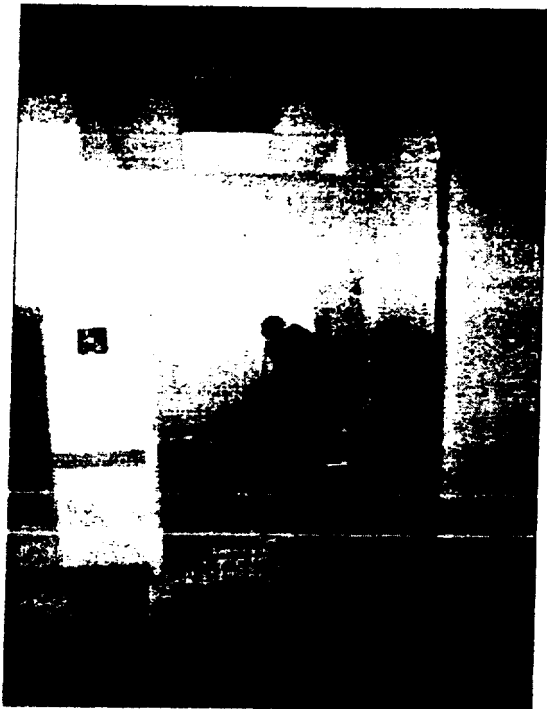


Figure 9a Two-story brick building, interior first floor

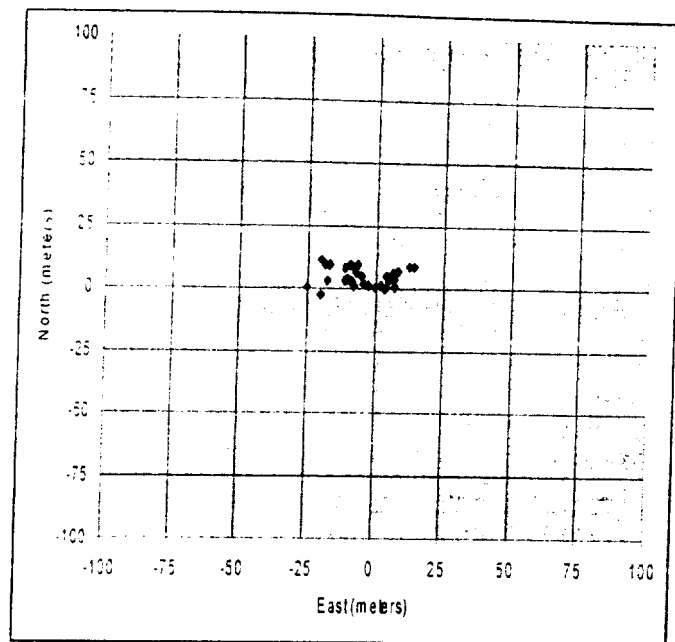


Figure 9b Shot pattern, first floor interior room

Test Location: Two-story office building, interior

Figure 9 shows the location and results of this test in a two-story commercial brick building. As expected, the accuracy is comparable to most residential locations. The test equipment was placed in an interior first-floor room.

Test location: urban canyon

Figure 10a illustrates a somewhat typical downtown environment. Figure 10b and Figure 10c demonstrate server-aided system performance in this environment with and without altitude aiding. In this test case, altitude aiding resulted in a 30% accuracy improvement. In weaker signal environments, altitude aiding is very important, improving satellite geometry, as well as providing a reliable extra measurement in the navigation solution.



Figure 10a Urban canyon, downtown Denver

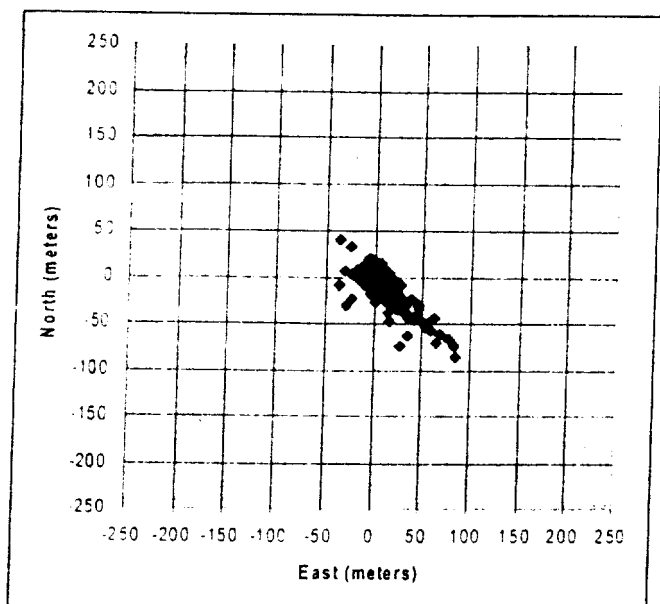


Figure 10b Shot pattern, urban canyon, altitude aided

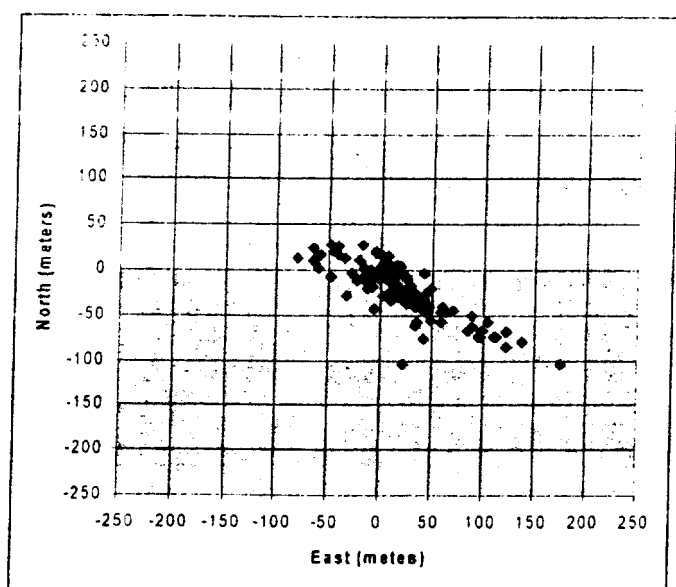


Figure 10c Shot pattern, urban canyon, unaided

Test Location: 50-Story Glass/Steel Building, 21st floor, 14 feet from outside wall

Figure 11a illustrates a signal environment with poor signal strength and long multipath. In previous tests, either the signal strength (and therefore often the geometry) or path length differences were poor. In this case, 14 feet from the outside wall on the 21st floor of this building, both problems were evident, creating greater position biases due to reflections from a south-facing building, as shown in Figure 11b.

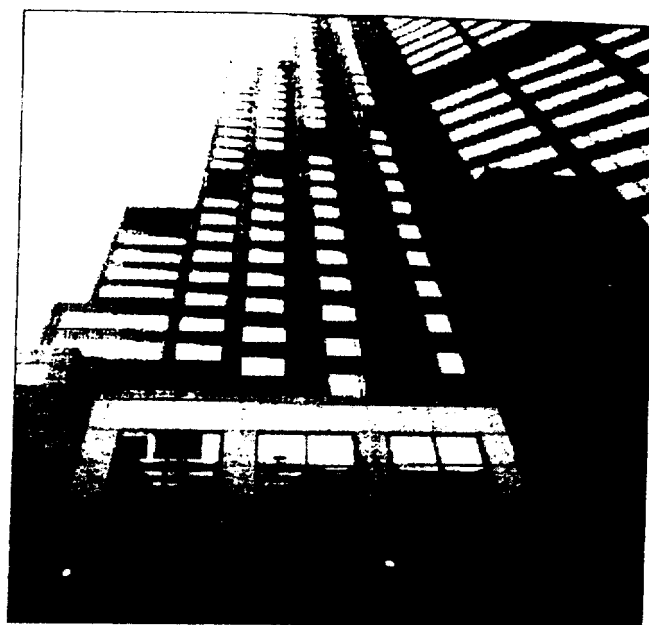


Figure 11a Fifty story glass/steel building

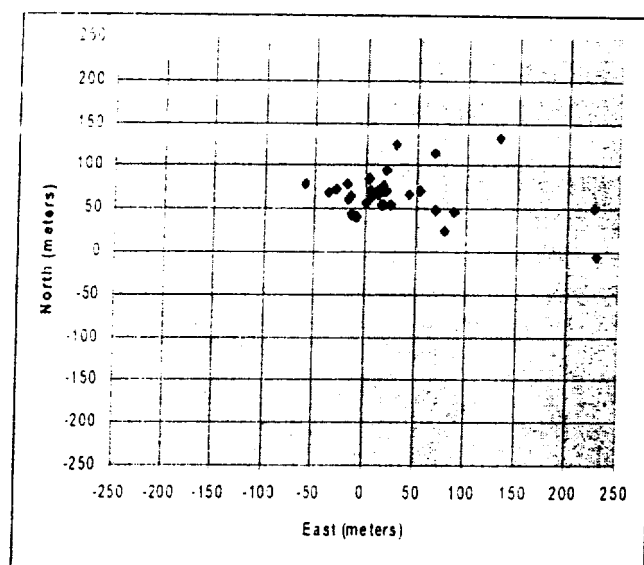


Figure 11b Shot pattern, inside 50-story building

Denver E-911 Trial

SnapTrack™ provided the enabling GPS technology for a recent end-to-end wireless E-911 trial conducted in the Denver area. Figure 12 is a good illustration of how the SnapTrack™ distributed system architecture can be used.

For this demonstration, a single reference receiver provided reference information to a location server. The SnapTrack™ sensor was programmed with the Mobile Identification Number (MIN) of an accompanying digital phone, so that their separate calls could later be matched by the SignalSoft Service Control Point (SCP). (In this

to the SnapTrack sub-handset and the digital phone

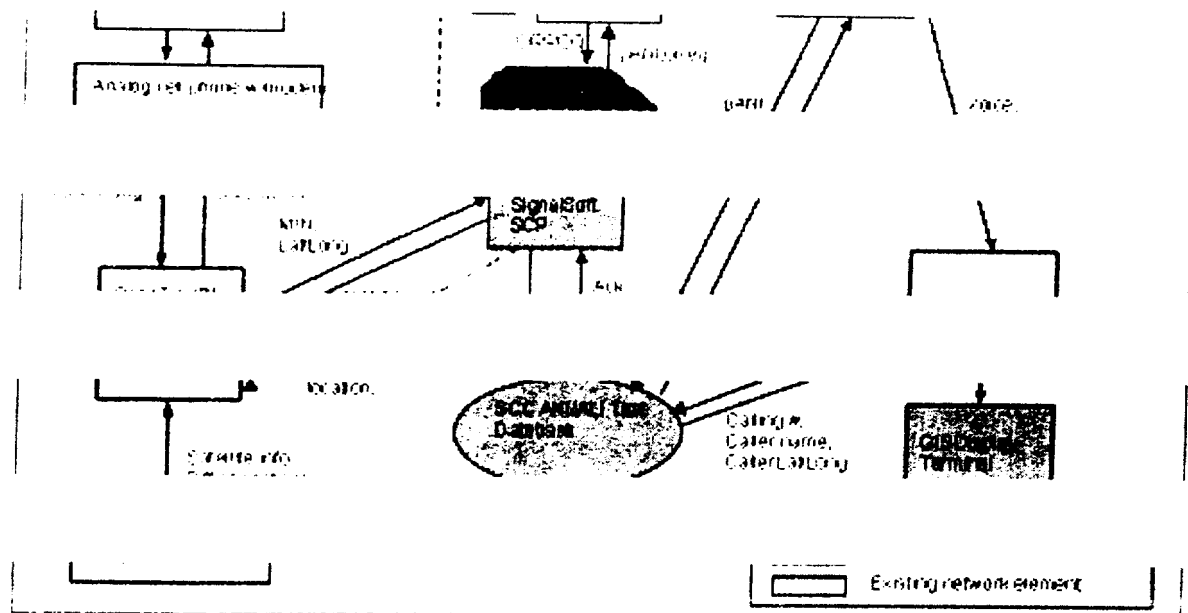


Figure 12 Denver E-911 trial system

provided E911 functionality.) When the mobile user placed a call to the Public Safety Access Point (PSAP), the two pieces of information were combined into a single call by the SCP when presenting the information to the SCC database. This database provided call routing instructions for the digital cell phone's 911 voice call. The SCP was able to determine which PSAP should receive each call using the location information from the LocationServer and a digital map of PSAP coverage boundaries. The SCC ANI/ALI database also provided the handset location to the selected PSAP, pin-pointing the caller location on a GIS map display.

Figure 13 shows results from driving through an urban canyon in downtown Denver. The small clusters of points in Figure 13 are located near stop lights on the route out of downtown. Figure 14 illustrates the results of dynamic vehicle testing on an urban highway.

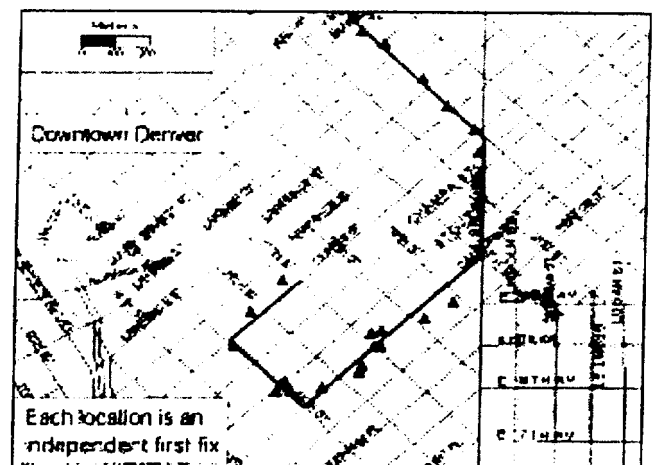


Figure 13 Driving out of urban canyon

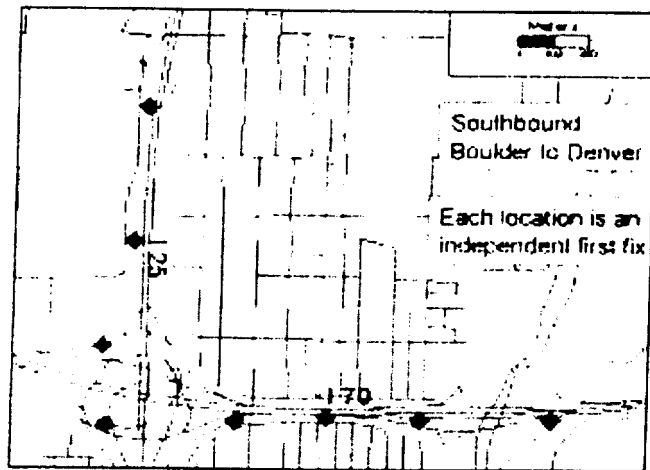


Figure 14 Urban highway

SUMMARY

SnapTrack™ server-aided GPS improves upon conventional GPS performance by sharing processing and database functions between the mobile GPS receiver/processor (the client) and a remote infrastructure (the server and reference network). The result is a highly sensitive, cost-effective, low-power, GPS receiving system that provides first fixes in a few seconds from a cold start, even where conventional GPS is unworkable or unreliable.

Audited field test results demonstrate accuracy of 3-100 meters (depending on degree of blockage), which is substantially better than the 125 meters required by the recent FCC E911 mandate, even in severe blockage and multipath environments.

REFERENCES

- [1] Krasner, Patent 5,663,734
- [2] Krasner, Wolf, Bell, and Wilson, "SnapTrack Enhanced GPS Technology: Field Test Results Using Prototype GPS Handset Antenna, Including the Impact of User Head Blockage.", submitted to the T1P1.5 GSM Working Group, August 17, 1998